

OVERVIEW FINISHING OPTIONS

Issue 03.2020 –
Replaces 06.2018

AIREX® structural foam core material

- / FlexiCut (FC)
- / Grooved & Perforated (GP)
- / ContourKore, knife cut (CK kc)
- / Perforated 30 (P30)
- / ContourKore, saw cut (CK sc)
- / Grooved 50 (G50)
- / Mini ContourKore (MCK)
- / AIREX® SealX surface sealing (SX)
- / Precision Thickness (PT)




BALTEK® structural balsa core material

- / CountourKore (CK)
- / Adaptive ContourKore (ACK)
- / ContourKore (CK), combination cut

Rating of Finishing Options regarding specific requirements

most suitable ●●● suitable ●● ok ●




FlexiCut (FC)

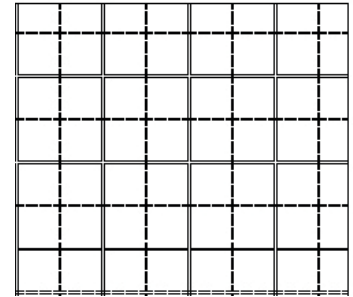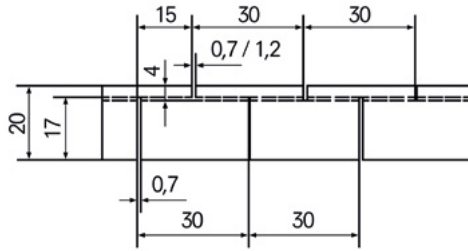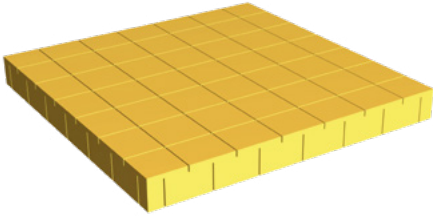

- / 30 x 30 mm cross-grooved both sides (40 x 40 mm for sheets > 35 mm)
- / kerf depth 85% / 20% of thickness
- / general kerf width 0.7 mm and 1.2 mm
- / 2'200 holes / m²

Sheet flexibility ●● Resin uptake ●● Promotes resin flow in infusion ●● Laminate surface quality ●●● (0.7 mm width)




ContourKore, knife cut (CK kc)

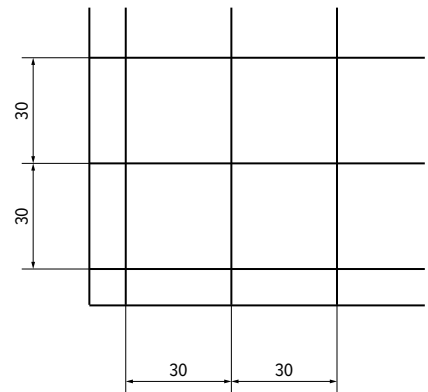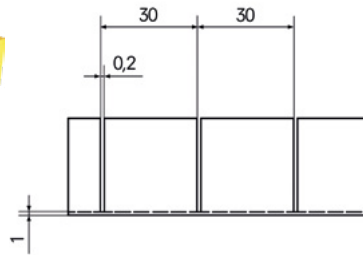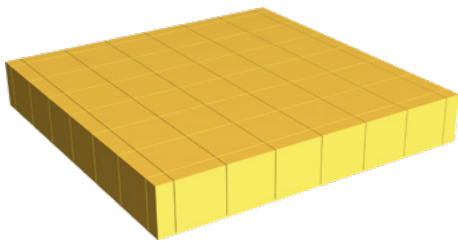

- / 30 x 30 mm bloc pattern
- / kerf width approx. 0.2 mm
- / glass fiber cloth on bottom side of sheet
- / blocs are cut almost down to cloth

Sheet flexibility ●●● Resin uptake ●●● Promotes resin flow in infusion ●● Laminate surface quality ●●●


ContourKore, saw cut (CK sc)

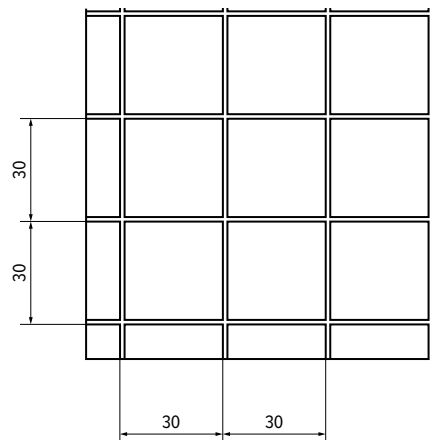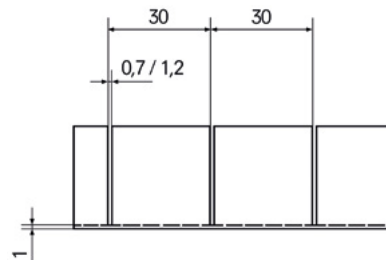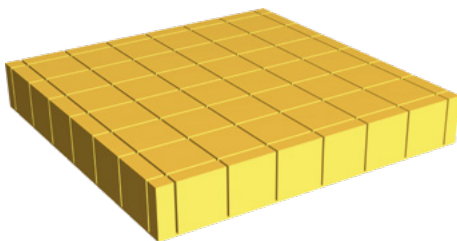



- / 30 x 30 mm bloc pattern (40 x 40 mm if sheet is ≥ 31 mm)
- / general kerf width 0.7 mm and 1.2 mm
- / glass fiber cloth on bottom side of sheet
- / blocs are cut almost down to cloth

Sheet flexibility ●●● Resin uptake ●●● Promotes resin flow in infusion ●● Laminate surface quality ●●●

Mini ContourKore (MCK)

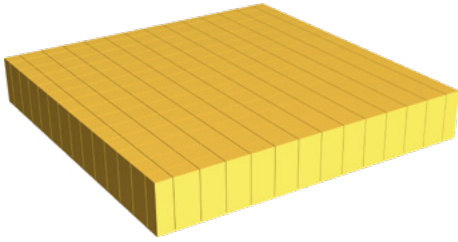


- / 15 x 15 mm bloc pattern
- / kerf width approx. 0.2 mm
- / glass fiber cloth on bottom side of sheet
- / blocs are cut almost down to cloth

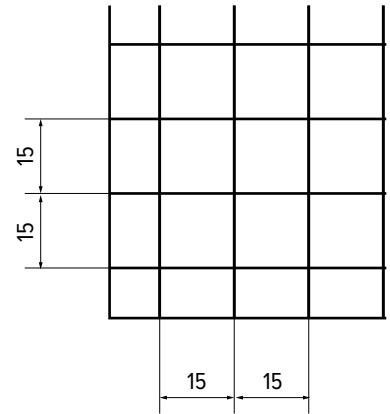
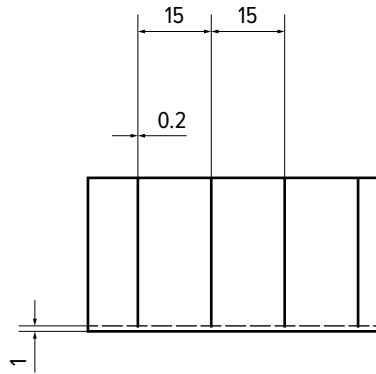


Sheet flexibility ●●● Resin uptake ●● Promotes resin flow in infusion ●● Laminate surface quality ●●●

Grooved & Perforated (GP)

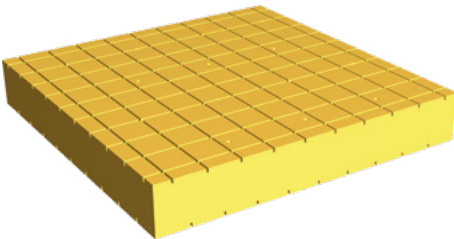


- / cross-grooved both sides
- / groove width 1.2 mm, depth approx. 2.5 mm
- / grooving distance 20 mm
- / grooving offset both sides 10 mm
- / holes (diameter 2.5 mm)
- / hole distance 32 x 32 mm pattern
- / holes may not be aligned with grooves

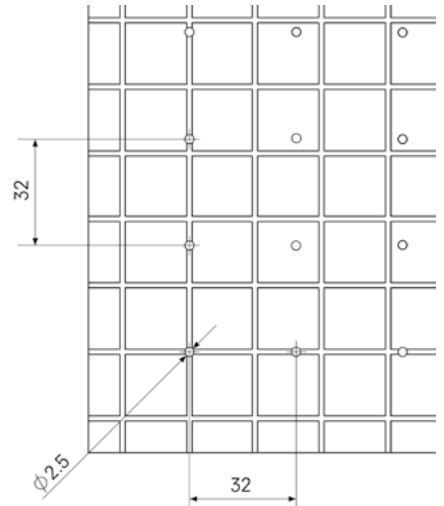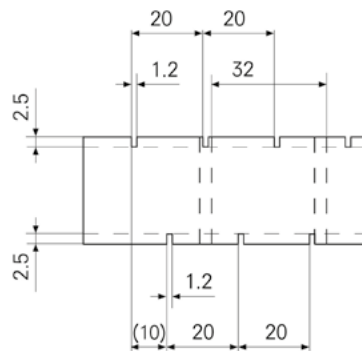


Sheet flexibility Resin uptake ●● Promotes resin flow in infusion ●●● Laminate surface quality ●

Perforated 30 (P30)


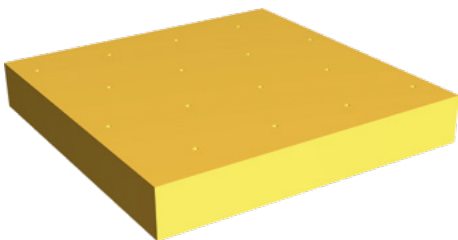


- / holes (diameter 2.5 mm)
- / hole distance 32 x 32 mm pattern

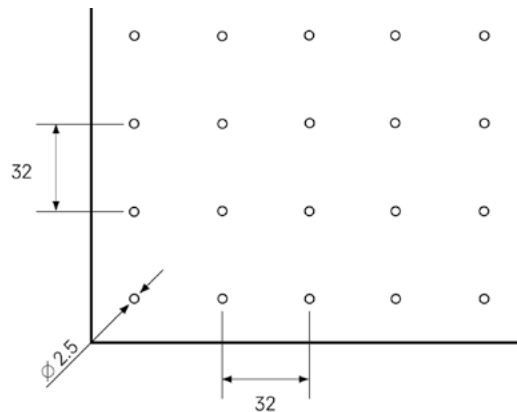

Sheet flexibility Resin uptake ●●● Promotes resin flow in infusion ● Laminate surface quality ●●●


Grooved 50 (G50)

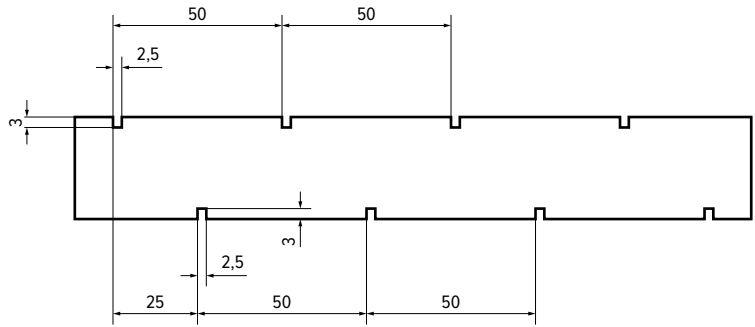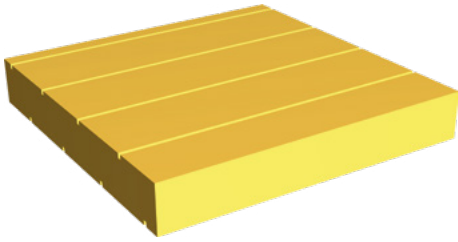

- / parallel or crosswise grooves
- / one side or both sides
- / grooving distance 50 mm
- / groove depth approx. 3 mm
- / groove width 2.5 mm

Sheet flexibility Resin uptake ●● Promotes resin flow in infusion ● Laminate surface quality ●


AIREX® SealX surface sealing (SX)

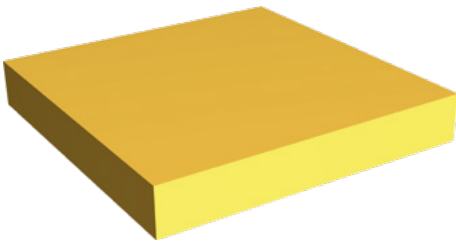

- / surface sealing for AIREX® PET foams
- / available for AIREX® T90 and T92 (densities up to 130 kg/m³)
- / designed for resin infusion
- / considerable reduction of resin uptake in infusion processes




Sheet flexibility Resin uptake ●●● Promotes resin flow in infusion Laminate surface quality

Precision Thickness (PT)

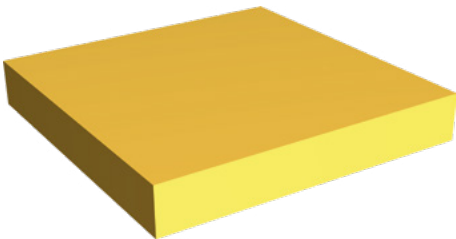

- / improved thickness tolerance of sheet:
- / PT02: +0.2 / -0.4 mm (0.6 mm range)

ContourKore (CK)

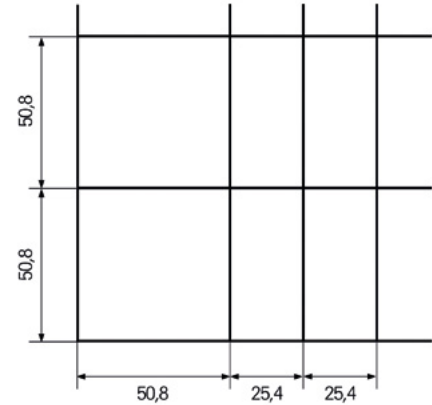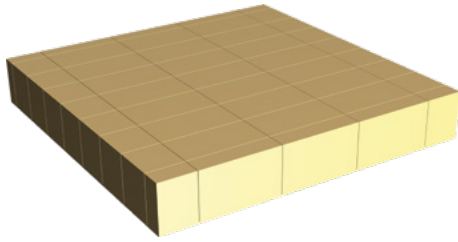



- / 25.4 x 50.8 mm bloc pattern (50.8 x 50.8 mm first and last row)
- / kerf width approx. 0.2 mm (knife cut)
- / glass fiber cloth on bottom side of sheet
- / blocs are cut almost down to cloth
- / 6.4 - 44.5 mm thickness

Sheet flexibility ●● Resin uptake ●● Promotes resin flow in infusion ●● Laminate surface quality ●●●

Adaptive CountourKore (ACK)

Widthwise Panel Cut		CORE THICKNESS (mm)											
mm	inches	6.4	9.5	12.7	16	19	25	32	38	45	51	57	64
0	0												
25.4	1	Standard											
50.8	2												
76.2	3												
101.6	6												
Cut Tolerance		± 5 mm											


Lengthwise Panel Cut		CORE THICKNESS (mm)											
mm	inches	6.4	9.5	12.7	16	19	25	32	38	45	51	57	64
0	0												
50.8	2	Standard											
203.2	6												
Cut Tolerance		± 5 mm											

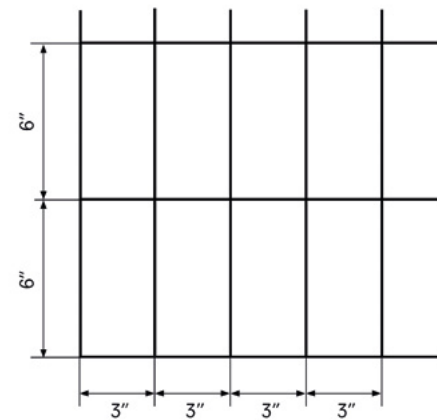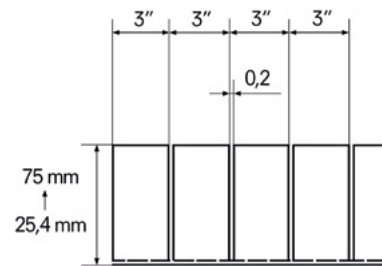



Sheet flexibility ●● Resin uptake ●● Promotes resin flow in infusion ●● Laminate surface quality ●●●

Note: limitations of availability may apply for specific products, densities or thicknesses

Adaptive ContourKore (ACK)

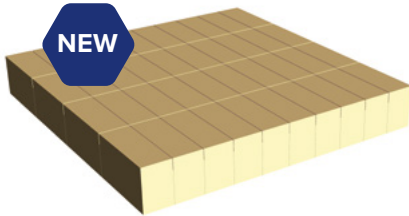

- / 3 x 6" bloc pattern
- / all material > 2"
- / blade kerf width approx. 0.2 mm (knife cut)
- / 44.5 - 76.2 mm thickness
- / saw kerf 1.3 mm

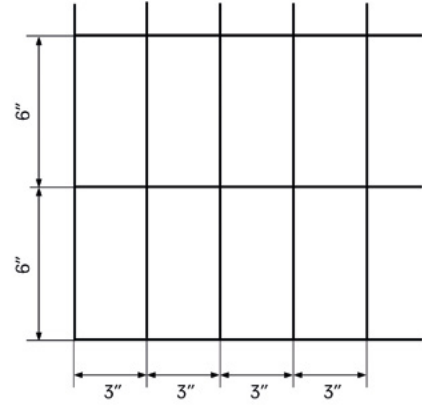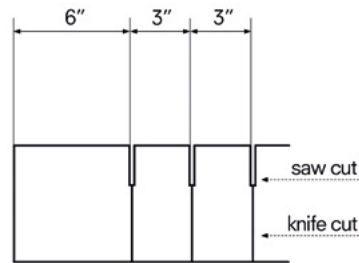

Sheet flexibility ●●● Resin uptake ●●● Promotes resin flow in infusion ●●● Laminate surface quality ●●●